Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 02/10/2020							
Owner Information							
Owner Name: East Lake Woodlands Cluster Homes Improvement Association unit Four INC				Contact Person:			
Addres	S: 10 20 Evelyn Ct			Home Phone:			
	Oldsmar	Zip: 34677		Work Phone:			
County	· Pinellas			Cell Phone:			
	ce Company:			Policy #:			
Year of	Home: 1979	# of Stories: 1		Email:			
NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.							
	Iding Code: Was the structure be HVHZ (Miami-Dade or Broward	d counties), South Florida	Building Code (SFI	BC-94)?			
	A. Built in compliance with the a date after 3/1/2002: Building l	Permit Application Date (N	MM/DD/YYYY)/				
	B. For the HVHZ Only: Built in provide a permit application with	h a date after 9/1/1994: B	uilding Permit Appl				
X	C. Unknown or does not meet the	ne requirements of Answe	r "A" or "B"				
OR	of Covering: Select all roof covering: Year of Original Installation/Reering identified.						
•	_	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance		
	1. Asphalt/Fiberglass Shingle	9/5/19	FL#10124	2019			
	2. Concrete/Clay Tile						
	☐ 3. Metal						
	 A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later. B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later. C. One or more roof coverings do not meet the requirements of Answer "A" or "B". 						
	A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.						
C. Plywood/OSB roof sheathing with a minimum thickness of 7/16" inch attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width)OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent Inspectors Initials Property Address 10 20 Evelyn Ct, Oldsmar, FL 34677							
	•						

		or greater resi	istance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least			
	П	D. Reinforced Concrete Roof Deck.				
			or unidentified.			
		G. No attic a				
1						
4.		eet of the inside	achment: What is the WEAKEST roof to wall connection? (Do not include attachment of hip/valley jacks within e or outside corner of the roof in determination of WEAKEST type)			
		A. Toe Nails				
			Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or			
			Metal connectors that do not meet the minimal conditions or requirements of B, C, or D			
	Mir	nimal conditio	ons to qualify for categories B, C, or D. All visible metal connectors are:			
			Secured to truss/rafter with a minimum of three (3) nails, and			
		×	Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.			
	X	B. Clips				
		×	Metal connectors that do not wrap over the top of the truss/rafter, or			
			Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails.			
		C. Single Wr				
			Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.			
	☐ D. Double Wraps					
			Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or			
			Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.			
		E. Structural	Anchor bolts structurally connected or reinforced concrete roof.			
		F. Other:				
		G. Unknown	or unidentified			
		H. No attic a	ccess			
5.			What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).			
		A. Hip Roof	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter.			
	П	B. Flat Roof	Total length of non-hip features: feet; Total roof system perimeter: feet			
			less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area sq ft			
	X	C. Other Roo	of Any roof that does not qualify as either (A) or (B) above.			
6.		A. SWR (also sheathing dwelling to	r Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) o called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the from water intrusion in the event of roof covering loss.			
		B. No SWR.	or undetermined.			
In			Property Address 10 20 Evelyn Ct, Oldsmar, FL 34677			
X 1	hic -	varitiaatian fa	rm is valid for up to five (5) years provided no material changes have been made to the structure or			

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. <u>Opening Protection</u>: What is the <u>weakest</u> form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings **and** (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Opening Protection Level Chart		Glazed Openings				Non-Glazed Openings	
openi form	an "X" in each row to identify all forms of protection in use for each ng type. Check only one answer below (A thru X), based on the weakest of protection (lowest row) for any of the Glazed openings and indicate eakest form of protection (lowest row) for Non-Glazed openings.	Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure		Х	Х	Χ		Х
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
N	Opening Protection products that appear to be A or B but are not verified						
IN	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection	Χ				X	

- A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above).
 - Miami-Dade County PA 201, 202, and 203
 - Florida Building Code Testing Application Standard (TAS) 201, 202, and 203

☐ A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist

- American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
- Southern Standards Technical Document (SSTD) 12
- For Skylights Only: ASTM E 1886 and ASTM E 1996
- For Garage Doors Only: ANSI/DASMA 115

☐ A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above
☐ A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed
openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices
in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following
for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
• ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile – 4.5 lb.)
• SSTD 12 (Large Missile – 4 lb. to 8 lb.)
 For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.)

 \square B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist

 \square B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above

☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above

C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).

C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist

☐ C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above

☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials Property Address 10 20 Evelyn Ct, Oldsmar, FL 34677

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

N. Exterior Opening Protection (unverified shutter sprotective coverings not meeting the requirements of An with no documentation of compliance (Level N in the ta	nswer "A", "B", or C" or systems th	Il Glazed openings are protected with at appear to meet Answer "A" or "B"		
☐ N.1 All Non-Glazed openings classified as Level A, B, C, o	r N in the table above, or no Non-Glaze	ed openings exist		
☐ N.2 One or More Non-Glazed openings classified as Level table above	D in the table above, and no Non-Glaze	d openings classified as Level X in the		
\square N.3 One or More Non-Glazed openings is classified as Leve	el X in the table above			
X. None or Some Glazed Openings One or more Glazed	ed openings classified and Level X	in the table above.		
MITIGATION INSPECTIONS MUST B Section 627.711(2), Florida Statutes, provi	ides a listing of individuals who ma	y sign this form.		
Qualified Inspector Name: Robert Martin	Home inspector	License or Certificate #: HI7816		
Inspection Company: RMC Inspections, LLC	Phone:	727-422-7688		
Qualified Inspector – I hold an active license as a	: (check one)			
 ✓ Home inspector licensed under Section 468.8314, Florida Statute training approved by the Construction Industry Licensing Board ☐ Building code inspector certified under Section 468.607, Florida 	and completion of a proficiency exam.	ber of hours of hurricane mitigation		
General, building or residential contractor licensed under Section Professional engineer licensed under Section 471.015, Florida St	atutes.			
□ Professional architect licensed under Section 481.213, Florida St □ Any other individual or entity recognized by the insurer as posse verification form pursuant to Section 627.711(2), Florida Statute	ssing the necessary qualifications to pro	operly complete a uniform mitigation		
Individuals other than licensed contractors licensed under Section 489.111, Florida Statutes, or professional engineer licensed under Section 471.015, Florida Statues, must inspect the structures personally and not through employees or other persons. Licensees under s.471.015 or s.489.111 may authorize a direct employee who possesses the requisite skill, knowledge, and experience to conduct a mitigation verification inspection. I, Robert Martin am a qualified inspector and I personally performed the inspection or (licensed (print name) contractors and professional engineers only) I had my employee () perform the inspection (print name of inspector) An individual or entity who knowingly or through gross negligence provides a false or fraudulent mitigation verification form is subject to investigation by the Florida Division of Insurance Fraud and may be subject to administrative action by the appropriate licensing agency or to criminal prosecution. (Section 627.711(4)-(7), Florida Statutes) The Qualified Inspector who certifies this form shall be directly liable for the misconduct of employees as if the authorized mitigation inspector personally performed the inspection. Homeowner to complete: I certify that the named Qualified Inspector or his or her employee did perform an inspection of the residence identified on this form and that proof of identification was provided to me or my Authorized Representative.				
Signature: Date:				
An individual or entity who knowingly provides or utters a false or fraudulent mitigation verification form with the intent to obtain or receive a discount on an insurance premium to which the individual or entity is not entitled commits a misdemeanor of the first degree. (Section 627.711(7), Florida Statutes)				
The definitions on this form are for inspection purposes on as offering protection from hurricanes.		ny product or construction feature		
Inspectors Initials Property Address 10 20 Evelyn Ct, Oldsmar, FL 34677				
*This verification form is valid for up to five (5) years provinaccuracies found on the form.	ided no material changes have be	en made to the structure or		



STATE OF FLORIDA DEPARTMENT OF BUSINESS AND PROFESSIONAL REGULATION

HOME INSPECTORS LICENSING PROGRAM

THE HOME INSPECTOR HEREIN IS CERTIFIED UNDER THE PROVISIONS OF CHAPTER 468, FLORIDA STATUTES

MARTIN, ROBERT W

728 5TH AVE NE LARGO FL 33770

LICENSE NUMBER: HI7816

EXPIRATION DATE: JULY 31, 2020

Always verify licenses online at MyFloridaLicense.com



Do not alter this document in any form.

This is your license. It is unlawful for anyone other than the licensee to use this document.



RMC Incpections, LLC rmcinspections@gmail.com

Exterior Photos

Front



Side




Side

Rear





RMC Incpections, LLC rmcinspections@gmail.com

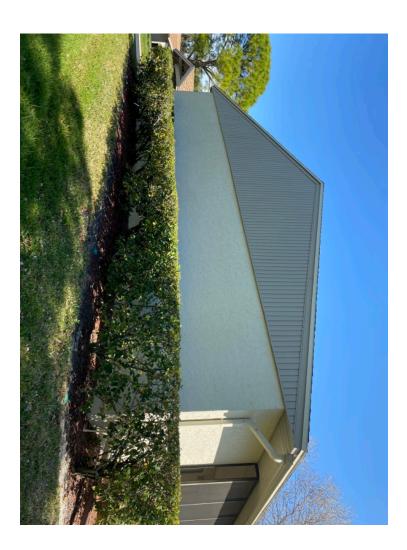


Roof Deck Attachment

MT6 Nail Spacing



RMC Incpections, LLC rmcinspections@gmail.com

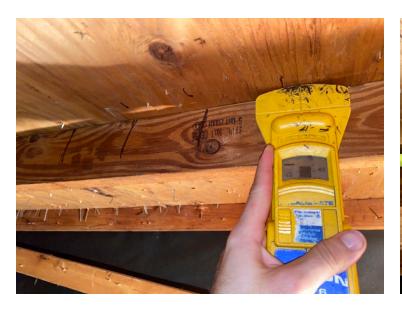



Nail Type



Roof To Wall Connection

Clips



RMC Incpections, LLC rmcinspections@gmail.com



