Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 02/10/2020									
Owner Information									
	Name: East Lake Woodlands Cluste	Contact Person:							
Addres		,		Home Phone:					
	Oldsmar	Zip: 34677			Work Phone:				
	. Pinellas				Cell Phone:				
	nce Company:	T		•	Policy #:				
Year of	f Home: 1979	# of Stories: 1		Email:					
accomp though	: Any documentation used in wear this form. At least one phany this form at least one phans. The insurer may ask addition	otograph must accompa onal questions regardin	any this form to valid g the mitigated featu	late each attribute markedure(s) verified on this form	d in questions 3 1.				
	ilding Code: Was the structure b HVHZ (Miami-Dade or Broward				R for homes located in				
	A. Built in compliance with the a date after 3/1/2002: Building I	FBC: Year Built	For homes built	· · · · · · · · · · · · · · · · · · ·	rmit application with				
	B. For the HVHZ Only: Built in	* *		For homes built in 19	994, 1995, and 1996				
	provide a permit application wit	h a date after 9/1/1994: B	uilding Permit Applic	cation Date (MM/DD/YYYY)/	/				
X	C. Unknown or does not meet the	ne requirements of Answe	r "A" or "B"						
OR	of Covering: Select all roof cove Year of Original Installation/Rej								
cov	rering identified.				No Information				
	2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	Provided for Compliance				
	■ 1. Asphalt/Fiberglass Shingle	9/4/19	FL#10124	2019					
	2. Concrete/Clay Tile								
	3. Metal								
	4. Built Up								
	5. Membrane								
	6. Other								
X	installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later. □ B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later. □ C. One or more roof coverings do not meet the requirements of Answer "A" or "B".								
3. Ro	of Deck Attachment: What is the	e weakes t form of roof de	ck attachment?						
	A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.								
	B. Plywood/OSB roof sheathing with a minimum thickness of 7/16" inch attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.								
×	C. Plywood/OSB roof sheathing with a minimum thickness of 7/16" inch attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width)OR-Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent.								
Inspectors Initials Property Address 110 120 130 140 Evelyn Ct, Oldsmar, FL 34677									

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. Page 1 of 4 OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155

		or greater res	sistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least
		-	ed Concrete Roof Deck.
			n or unidentified.
		G. No attic a	access.
4.		eet of the insic	tachment: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within de or outside corner of the roof in determination of WEAKEST type)
		A. Toe Nail	
			Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or
			Metal connectors that do not meet the minimal conditions or requirements of B, C, or D
	Miı	nimal conditi	ons to qualify for categories B, C, or D. All visible metal connectors are:
		X	Secured to truss/rafter with a minimum of three (3) nails, and
		×	Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.
	X	B. Clips	
			Metal connectors that do not wrap over the top of the truss/rafter, or
			Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails.
	X	C. Single W	
			Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
		D. Double V	
			Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or
			Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.
		E. Structura	Anchor bolts structurally connected or reinforced concrete roof.
		F. Other: _	
		G. Unknown	n or unidentified
		H. No attic a	access
5.		host structure	What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of e over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
		A. Hip Root	Total length of non-hip features: feet; Total roof system perimeter: feet
		B. Flat Root	less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area sq ft
	X	C. Other Ro	of Any roof that does not qualify as either (A) or (B) above.
6.		A. SWR (also sheathing	er Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) so called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the g or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the from water intrusion in the event of roof covering loss.
			n or undetermined.
In	spec	tors Initials <u>/</u>	<i>D A</i>
		• • • • •	

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. <u>Opening Protection</u>: What is the <u>weakest</u> form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings **and** (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Opening Protection Level Chart			Glazed O	Non-Glazed Openings			
Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.			Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure		Х	Х	Χ		Х
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
N	Opening Protection products that appear to be A or B but are not verified						
IN	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection					X	

- A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above).
 - Miami-Dade County PA 201, 202, and 203
 - Florida Building Code Testing Application Standard (TAS) 201, 202, and 203
 - American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
 - Southern Standards Technical Document (SSTD) 12
 - For Skylights Only: ASTM E 1886 and ASTM E 1996
 - For Garage Doors Only: ANSI/DASMA 115

- For Skylights Only: ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile 2 to 4.5 lb.)
- ☐ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
- ☐ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
- ☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above

C. Exterior Opening	<u> Protection-</u>	Wood	Structural	Panels	meeting	FBC	<u> 2007</u>	All	Glazed	openings	are	covered	with
plywood/OSB meeting	the requireme	nts of T	able 1609.1	.2 of the	FBC 2007	7 (Lev	el C in	the 1	table abo	ove).			

- ☐ C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist
- ☐ C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above
- ☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials Property Address 110 120 130 140 Evelyn Ct, Oldsmar, FL 34677

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

N. Exterior Opening Protection (unverified shutter sprotective coverings not meeting the requirements of Au with no documentation of compliance (Level N in the ta	nswer "A", "B", or C" or systems that								
• ` `	<i>'</i>								
□ N.1 All Non-Glazed openings classified as Level A, B, C, o									
☐ N.2 One or More Non-Glazed openings classified as Level table above	D in the table above, and no Non-Glazed	openings classified as Level X in the							
□ N.3 One or More Non-Glazed openings is classified as Leve	el X in the table above								
X. None or Some Glazed Openings One or more Glazed		the table above.							
MITIGATION INSPECTIONS MUST E Section 627.711(2), Florida Statutes, prov.	ides a listing of individuals who may								
Qualified Inspector Name: Robert Martin License Type: Home inspector License or Certificate #: HI7816									
Inspection Company: RMC Inspections, LLC	Phone:	727-422-7688							
Qualified Inspector – I hold an active license as a	: (check one)								
 ✓ Home inspector licensed under Section 468.8314, Florida Statute training approved by the Construction Industry Licensing Board ☐ Building code inspector certified under Section 468.607, Florida ☐ General, building or residential contractor licensed under Section 	es who has completed the statutory numb and completion of a proficiency exam. Statutes.	er of hours of hurricane mitigation							
☐ Professional engineer licensed under Section 471.015, Florida St	atutes.								
☐ Professional architect licensed under Section 481.213, Florida St									
Any other individual or entity recognized by the insurer as possessing the necessary qualifications to properly complete a uniform mitigation verification form pursuant to Section 627.711(2), Florida Statutes.									
Individuals other than licensed contractors licensed under	Section 489.111, Florida Statutes, o	or professional engineer licensed							
under Section 471.015, Florida Statues, must inspect the structures personally and not through employees or other persons. <u>Licensees under s.471.015 or s.489.111 may authorize a direct employee who possesses the requisite skill, knowledge, and</u>									
experience to conduct a mitigation verification inspection. Robert Martin am a qualified inspector a									
i,am a quameu inspector a	and I personally performed the insp	oection or (<i>licensed</i>							
(print name) contractors and professional engineers only) I had my emple	oyee () per (print name of inspec	form the inspection							
and I agree to be responsible for his/her/work. Qualified Inspector Signature: Date: 02/10/2020									
An individual or entity who knowingly or through gross negligence provides a false or fraudulent mitigation verification form is subject to investigation by the Florida Division of Insurance Fraud and may be subject to administrative action by the									
appropriate licensing agency or to criminal prosecution. (S									
certifies this form shall be directly liable for the misconduct of employees as if the authorized mitigation inspector personally performed the inspection.									
Homeowner to complete: I certify that the named Qualified Inspector or his or her employee did perform an inspection of the residence identified on this form and that proof of identification was provided to me or my Authorized Representative.									
Signature: Date:									
An individual or entity who knowingly provides or utters a false or fraudulent mitigation verification form with the intent to obtain or receive a discount on an insurance premium to which the individual or entity is not entitled commits a misdemeanor of the first degree. (Section 627.711(7), Florida Statutes)									
The definitions on this form are for inspection purposes only and cannot be used to certify any product or construction feature as offering protection from hurricanes.									
Inspectors Initials Property Address 110 120 130 140 Evelyn Ct, Oldsmar, FL 34677									
*This verification form is valid for up to five (5) years provinaccuracies found on the form.	ided no material changes have bee	n made to the structure or							

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155



STATE OF FLORIDA DEPARTMENT OF BUSINESS AND PROFESSIONAL REGULATION

HOME INSPECTORS LICENSING PROGRAM

THE HOME INSPECTOR HEREIN IS CERTIFIED UNDER THE PROVISIONS OF CHAPTER 468, FLORIDA STATUTES

MARTIN, ROBERT W

728 5TH AVE NE LARGO FL 33770

LICENSE NUMBER: HI7816

EXPIRATION DATE: JULY 31, 2020

Always verify licenses online at MyFloridaLicense.com



Do not alter this document in any form.

This is your license. It is unlawful for anyone other than the licensee to use this document.



RMC Incpections, LLC rmcinspections@gmail.com

Exterior Photos

Front



Side



Side



Rear





RMC Incpections, LLC rmcinspections@gmail.com

Roof Deck Attachment

MT6



Nail Spacing



Nail Type





RMC Incpections, LLC rmcinspections@gmail.com

Roof To Wall Connection






Back Side



RMC Incpections, LLC rmcinspections@gmail.com

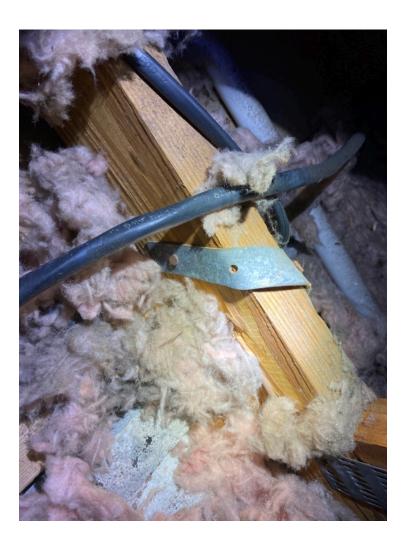

SWR/Permit



RMC Incpections, LLC rmcinspections@gmail.com

